



GB04/3840

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP10 8QQ

13 JAN 2005

WIPO

PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

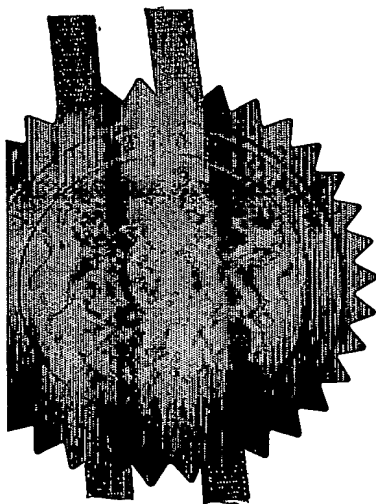

Signed


He Behen

Dated

29 December 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

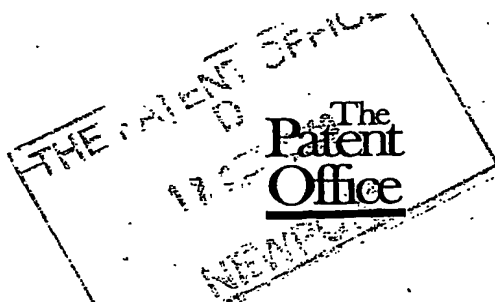

12SEP03 1836815-1 002887
P01/7700 0.00-0321350.1

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	XA1756		
2. Patent application number (The Patent Office will fill in this part)	0321350.1		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	BAE SYSTEMS plc 6 Carlton Gardens London, SW1Y 5AD		
Patents ADP number (if you know it)	07914674004 ✓		
If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom		
4. Title of the invention	BEAM STEERING APPARATUS		
5. Name of your agent (if you have one)			
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	BAE SYSTEMS plc Group IP Department Lancaster House, P.O. Box 87 Farnborough Aerospace Centre Farnborough, Hampshire, GU14 6YU		
Patents ADP number (if you know it)	07914674002		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	09
Claim(s)	03
Abstract	01
Drawing(s)	04

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Lorraine Humphrey

Date

11 September 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Maria Burkes 01252 383487

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

- 1 -

Beam Steering ApparatusField of the Invention

The present invention relates to beam steering apparatus and is suitable,
5 particularly but not exclusively, for use with antennas arranged to transceive
radio frequency signals.

Background of the Invention

Many different signal processing systems are faced with the problem of
capturing signals that emanate from different directions. Examples of such
10 systems include Radio Frequency (RF) base stations, air traffic control systems,
and satellite systems (to name a few), which either employ mechanical devices
comprising an antenna that physically moves in space, or electronic devices
comprising antenna elements that apply various phase shifts to incident signals,
thereby effectively steering the incident signal. These electronic devices are
15 commonly referred to as phased antenna arrays and are becoming more and
more commonly used in RF sensor and communications systems because they
do not involve physical motion of the antenna and are capable of moving a
beam rapidly from one position to the next.

Phased arrays are conventionally implemented by applying a phase and
20 amplitude weight to an element of an antenna array. By altering the phase
slope applied across the array the pointing direction of the beam can be
controlled. Alternatively a time delay is applied to an element of an antenna
array; an advantage of applying time delays as opposed to a phase shift is that
time is frequency independent, whereas phase is frequency dependent (for two
25 different frequencies, the same amount of phase is equivalent to two different
amounts of time and thus two different beam directions; if two signals of
different frequencies are received and processed at the same time, this same
amount of phase will result in the beams being steered in two different
directions).

Antennas that are designed to instantaneously receive signals over a broad range of frequencies typically apply an amount of time to each element instead of an amount of phase, since this enables incident beams to be steered independently of their respective frequencies. Time delay systems essentially
5 comprise time delay units having transmission lines of varying lengths and incoming signals are passed through various lengths in order to modify the direction of the beam. Conventional systems typically include digital devices that switch in these transmission lines, effectively adding discrete time delay "bits" to the beams. A problem with these systems is that the transmission lines
10 occupy physical space, and, for a large array of antenna elements, many different lengths of transmission lines are required, which results in bulky and costly arrangements.

An object of the invention is to provide a more compact beam steering apparatus.

15 Summary of the Invention

According to an aspect of the invention there is provided beam steering apparatus comprising:

an antenna array having a plurality of antenna elements, the antenna elements being spatially arranged with respect to one another and being
20 operable to transceive signals; and

delay circuitry arranged to apply an amount of delay to signals transceived by the antenna elements, the delay circuitry comprising:

a plurality of first delay units, each of which is connected to a different one of the antenna elements, and is operable to selectively apply either a first
25 amount of delay or a second amount of delay to signals passing therethrough; and

a plurality of second delay units, each of which is connected in series to at least one of the first delay units and is operable to selectively apply either a third amount of delay or a fourth amount of delay to signals passing
30 therethrough;

wherein at least one of said second delay units is connected in series to at least two of the first delay units.

Thus in embodiments of the invention a given second delay unit is effectively re-used by a plurality of first delay units, which means that duplication of second delay units is minimised. In the event that the antenna array comprises a significant number of antenna units, and the delay circuitry comprises a corresponding significant number of first delay units, the delay circuitry preferably comprises further delay units arranged in series with the second delay units, and each further delay unit is connected to at least two second delay units. Thus this feature of re-use of time delay units is reproduced by each set of time delay units.

In one embodiment the delay circuitry is provided by a plurality of switches arranged in series with one another, and a first difference between the first and second amounts of delay is different to a second difference between the third and fourth amounts of delay. In preferred arrangements the second difference is greater than the first difference, and the signals modified by the said at least two first delay units are combined prior to further modification by the second delay unit.

In one embodiment the signals are passed between within the delay circuitry via cables. However, in a preferred embodiment the transmission medium used is optical fibre, which, in comparison with cables has a reduced amount of relative loss and dispersion effects associated therewith, and provides a physically compact and stable solution that is resistant to electromagnetic interference. Accordingly the beam steering apparatus includes signal modulating means arranged to modulate the signals transceived by antenna elements. In one arrangement the signal modulating means comprises a plurality of signal modulating devices, each of which is arranged to modulate signals transceived by a different antenna element onto said respective optical carrier. Each optical carrier has a different frequency to that of the other carriers and can be provided by a laser.

In this embodiment, signals modified by the first units are collected into the same waveguide prior to modification by the second unit, and are only combined when the second time delay unit has applied the third or fourth amount of time delay. The beam steering apparatus comprises a demultiplexing
5 device arranged to separate out the respective carriers from the waveguide, and a demodulating unit arranged to demodulate the carriers from the optical domain into the radio frequency domain, at which point the signals are combined.

Further features and advantages of the invention will become apparent
10 from the following description of preferred embodiments of the invention, given by way of example only, which is made with reference to the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a schematic diagram showing a conventional phased antenna
15 array;

Figure 2 is a schematic diagram showing a first embodiment of a beamformer according to the invention;

Figure 3 is a schematic diagram showing an alternative arrangement of the beamformer of Figure 2; and

20 Figure 4 is a schematic diagram showing a second embodiment of a beamformer according to the invention.

Detailed Description of the Invention

Figure 1 shows a wavefront 10 incident on a beam steering apparatus implemented as conventional phased antenna array 1. In such known
25 arrangements the antenna array 1 comprises a plurality of antenna elements 100a, 100b, 100c, 100d, each of which is arranged to apply a certain amount of time delay to the part of the wavefront impinging thereon. The amount of time delay applied by each element is dependent on the shape of the wavefront and on the angle that the wavefront makes with respect to the antenna elements
30 (referred to herein as direction of arrival of the wavefront); as can be seen from

- 5 -

Figure 1, different amounts of time delay are applied to each element, and the difference between the amounts of time delay applied by respective antenna elements is greatest between peripheral antenna elements 100a, 100d.

5 In this conventional arrangement, each antenna element 100a, 100b, 100c, 100d is connected to a plurality of delay units such 101a, 103a ... 101d, 103d that are arranged in series. Note that the embodiment shown in Figure 1 is illustrative only; in practice many more antenna elements will be used. When embodied as a two way switch, at any instant of time each delay unit is arranged to apply one of two amounts of time delay - here 0 and L for first delay units 101a ... 101d, and 0 and 2L for second delay units 103a ... 103d. Thus, in this example the first and second amounts of delay are 0 and L and the third and fourth amounts of delay are 0 and 2L respectively. It should be noted that the arrangement shown in the Figure is ideal since it implies that multiples of delay L compensate precisely for corresponding multiples of D.

15 In the Figure the signal path taken through a switch is indicated by a solid line. Thus in this example the incoming wave 10 is effectively steered by applying a delay of 0 to the wave received by antenna element 100a, by applying a delay of L to the wave received by antenna element 100b, by applying a delay of 2L to the wave received by antenna element 100c, and by applying a delay of 3L to the wave received by antenna element.

20 The degree of time delay control is dependent on the delay applied by the time delay units (here switches 101a ... 103d), and selection of this degree of time delay control is dependent on a minimum acceptable quality of beam shape, which is governed by the maximum time delay error that can be suffered at each element. In the example shown in Figure 1, the smallest amount of time delay that can be applied is L, so the antenna array 1 can compensate for the direction of arrival of the wavefront with an accuracy of 1L.

30 It will be appreciated that, as the angle between the wavefront and the antenna elements 100a ... 100d increases, the difference between the amounts of time delay applied at peripheral antenna elements 100a, 100d has to increase correspondingly. Furthermore, if the wavefront is to be steered at

various positions along its length, the antenna array 1 will have to comprise many time delay units in series with one another, which means that the antenna array 1 can be quite large and complex. Moreover, if fine-tuning of the time delay control is required (meaning that the amount of delay (L) applied by the first time delay units 101a ... 101d is small), even more delay units will be required.

Embodiments of beam steering apparatus according to the invention will now be described with reference to Figures 2 and 3. Turning firstly to Figure 2, in a first embodiment of the invention, referred to herein as a beamformer, the beamformer 2 comprises a plurality of first delay units 101a ... 101d, each of which is arranged to apply an amount of time delay to signals transceived by a respective antenna element, and a plurality of second delay units 203a, 203b, each of which is arranged to apply an amount of time delay to signals that have been modified by the first delay units 101a ... 101d. At least one 203a, and preferably both 203a, 203b, of the second units are connected to two first delay units 101a, 101b via a combiner unit 205a, 205b, which, in the case of combiner unit 205a, is arranged to combine signals that have been modified by the associated first delay units 101a, 101b, and in the case of combiner unit 205b, is arranged to combine signals that have been modified by the associated first delay units 101c, 101d. Preferably the combiner units 205a, 205b sum the modified signals, and pass them onto the second delay units 203a, 203b, which proceed to apply a further delay to the signals. These further modified signals are then combined in another combiner unit 207, summing the further delayed signals.

Turning again to Figure 1, it can be seen that when the antenna array 1 is applying 0, L , $2L$ and $3L$ delay to signals transceived at respective antenna elements 100a ... 100d, second switches 103a, 103b assume the same switch position as one another (in this example $2L$), and second switches 103c, 103d assume the same switch position as one another (in this example 0). By use of the present invention, the duplication of delay units is reduced, which means that the antenna array includes fewer delay units. As a result, antenna arrays

can be produced according to the invention, which are less bulky, complex and costly than those currently utilized.

In the example shown in Figure 2, there are only four antenna elements, and, since the first delay units 101a ... 101d are embodied as two-way switches (meaning that each combiner unit 205a, 205b receives input from two first units), the beamformer 2 only comprises two levels of delay units. However, in practical embodiments of the invention, beamformers comprise a significantly greater number of antenna elements, which means that the number of levels of delay units will increase accordingly. Figure 3 shows an example where the beamformer comprises eight antenna elements 100a ... 100h and three levels of delay units (101a ... 101h, 203a ... 203d, 209a and 209b). The improved efficiency, in terms of reduction of duplicated delay units (and corresponding re-use or "sharing" of amounts of delay) can be readily appreciated with increasing numbers of antenna elements and amounts of delay required.

In one embodiment the signals are passed between delay units 101a ... 101d, 103a ... 103d and combiner units 205a, 205b via cables. However, in a further embodiment the transmission medium used is optical fibre, in order to reduce relative losses and dispersion effects, and to provide a physically compact and stable solution that is resistant to electro-magnetic interference.

Figure 4 shows a further embodiment of the beam steering apparatus according to the present invention. Transceived Radio Frequency (RF) signals are in this embodiment modulated onto an optical carrier by laser devices 413a ... 413d, and the (first and subsequent) delay units 401a ... 401d, 403a ... 403d, etc. are preferably embodied in Opto Electronic Integrated Circuits (OEIC). Each transceived signal is modulated onto an optical carrier having a wavelength, for example, in the 1300 nm or in the 1550 nm band.

The summation of signals performed by respective combiner units 405a, 405b, 407 etc. can be performed in the optical domain, but more preferably is performed in the RF domain because RF signals have a far longer wavelength (thus more relaxed accuracy requirements) than that of optical carriers. In one arrangement the signals can be summed, as described above with reference to

Figures 2 and 3, at each combiner unit, which involves demodulating and re-modulating the RF signals from their respective carriers at each combiner unit (meaning that the combiner units will require the corresponding modulating and demodulating capabilities). Preferably, however, the signals are merely
5 collected by combiner units 405a, 405b in the optical domain and are only summed when the collected signals have been separated out and demodulated into the RF domain. This means that only one device is required to have demodulating capabilities.

Accordingly, in this arrangement each transceived signal is modulated
10 onto an optical carrier of a different wavelength, and each combiner unit 205a, 205b, 207 etc. is arranged to input signals received from its associated first units 101a, 101b into the same waveguide. Wavelengths in the 1300 nm and 1550 nm bands can be used, and the wavelengths are spaced apart so that there is no interference between the carriers (e.g. spacing between 0.1 nm and
15 14 nm can be used). The combined signals pass through the next and, if relevant, successive delay units 403a, 403b as described above with reference to Figure 2, with identical time delays being applied to those wavelengths passing through the same delay unit. The beamformer 2 may also comprise a final combiner 407 and a conventional wavelength demultiplexing device 415
20 that is arranged to demultiplex the wavelengths at the output using conventional wavelength demultiplexing techniques. These demultiplexed signals can then be demodulated and summed in the RF domain using a suitable device, shown as part 417.

Whilst in the above embodiments the time delay units are two-way
25 switches, they could alternatively be switches comprising three or more switching paths. In this case, the combiner units can be arranged to receive input from a corresponding three or more first units.

Whilst in the second embodiment the delay units are provided by OEIC, they could alternatively be provided by suitable mechanical switches.

30 Whilst in the above embodiments the entire beamformer is shown to be configured in accordance with the invention, the hierarchical arrangement of

first delay units and second delay units could alternatively be applied to a selected part of the beamformer.

Whilst in the above embodiments the delay unit arrangement includes one switchable delay unit at each node, the arrangement could alternatively comprise a plurality of two-way switchable delay units arranged in series at each node in at least the highest level nodes of the hierarchy (the antenna element level.) Each such a series would consist of delay units having progressively smaller time delay differences between their two respective settings (e.g. L , $L/2$, $L/4$, etc.), whereby a variety of time delays may be applied at selected increments (e.g. $L/4$) at each element. Thus, a variety of beam steering angles may be achieved by selecting appropriate settings for each of the switches in each of the series.

Whilst in the above embodiments the combiner units 205a ... 205d, 207a, etc. are shown to be separate from respective second delay units 203a ... 203d, 209a, 209b, they could alternatively be an integral part of the second delay units.

Whilst in the Figures the antenna elements 100a ... 100d are shown spaced in a linear array, they could alternatively be spaced in a circular array or a planar array.

The above embodiments are to be understood as illustrative examples of the invention. It is to be understood that any feature described in relation to any one embodiment may be used alone, or in combination with other features described, and may also be used in combination with one or more features of any other of the embodiments, or any combination of any other of the embodiments. Furthermore, equivalents and modifications not described above may also be employed without departing from the scope of the invention, which is defined in the accompanying claims.

Claims

1. Beam steering apparatus comprising:

an antenna array having a plurality of antenna elements, the antenna
5 elements being spatially arranged with respect to one another and being
operable to transceive signals; and

delay circuitry arranged to apply an amount of delay to signals
transceived by the antenna elements, the delay circuitry comprising:

a plurality of first delay units, each of which is connected to a different
10 one of the antenna elements, and is operable to selectively apply either a first
amount of delay or a second amount of delay to signals passing therethrough;
and

a plurality of second delay units, each of which is connected in series to
at least one of the first delay units and is operable to selectively apply either a
15 third amount of delay or a fourth amount of delay to signals passing
therethrough,

wherein at least one of said second delay units is connected in series to
at least two of the first delay units.

20 2. Beam steering apparatus according to claim 1, wherein a first difference,
between the first and second amounts of delay, is different to a second
difference, between the third and fourth amounts of delay.

3. Beam steering apparatus according to any one of the preceding claims,
wherein the said second difference of delay is greater than the said first
25 difference.

4. Beam steering apparatus according to any one of the preceding claims,
arranged to combine the signals modified by the said at least two first units and
to apply either the third or fourth amount of delay to said combined signals.

5. Beam steering apparatus according to claim 4, including a signal combiner unit arranged to combine the signals modified by the at least two first units.
6. Beam steering apparatus according to any one of the preceding claims, including signal modulating means arranged to modulate signals transceived by each of the antenna elements onto a respective carrier.
7. Beam steering apparatus according to claim 6, wherein the signal modulating means comprises a plurality of signal modulating devices, each of which is arranged to modulate signals transceived by a different antenna element onto said respective carrier.
8. Beam steering apparatus according to claim 7, wherein each carrier has a different frequency to that of the other carriers.
9. Beam steering apparatus according to any one of claims 6 to 8, wherein the signal modulating means is arranged to input each of said carriers into a different one of said plurality of first units, for delay of the signal therein.
10. Beam steering apparatus according to any one of claims 6 to 9, wherein the signal modulating means is arranged to modulate said signals onto an optical carrier.
11. Beam steering apparatus according to claim 10, wherein the data signals modified by the at least two first units are collected within a single optical waveguide and are input to said first second unit.
12. Beam steering apparatus according to claim 11, including a demultiplexing device arranged to demultiplex the collected modified data signals.
13. Beam steering apparatus according to claim 12, including signal processing means arranged to demodulate the demultiplexed data signals and to combine the demodulated signals.
14. Beam steering apparatus according to any one of claims 10 to 13, wherein each first unit and each second unit comprises an opto-electrical

switching device arranged to apply said first and second amounts of delay to a respective optical carrier.

15. Beam steering apparatus according to any one of the preceding claims,
wherein the antenna elements are spatially arranged so as to form a linear
5 array.
16. Beam steering apparatus according to any one of the preceding claims,
wherein the antenna elements are spatially arranged so as to form a circular
array.
17. Beam steering apparatus according to any one of the preceding claims,
10 wherein the antenna elements are spatially arranged so as to form a planar
array.

AbstractBeam Steering Apparatus

Embodiments of the invention are concerned with beam steering
5 apparatus comprising:

an antenna array having a plurality of antenna elements, the antenna elements being spatially arranged with respect to one another and being operable to transceive signals; and


delay circuitry arranged to apply an amount of delay to signals
10 transceived by the antenna elements, the delay circuitry comprising:

a plurality of first delay units, each of which is connected to a different one of the antenna elements, and is operable to selectively apply either a first amount of delay or a second amount of delay to signals passing therethrough; and

15 a plurality of second delay units, each of which is connected in series to at least one of the first delay units and is operable to selectively apply either a third amount of delay or a fourth amount of delay to signals passing therethrough,


wherein at least one of said second delay units is connected in series to
20 at least two of the first delay units.

Figure 2

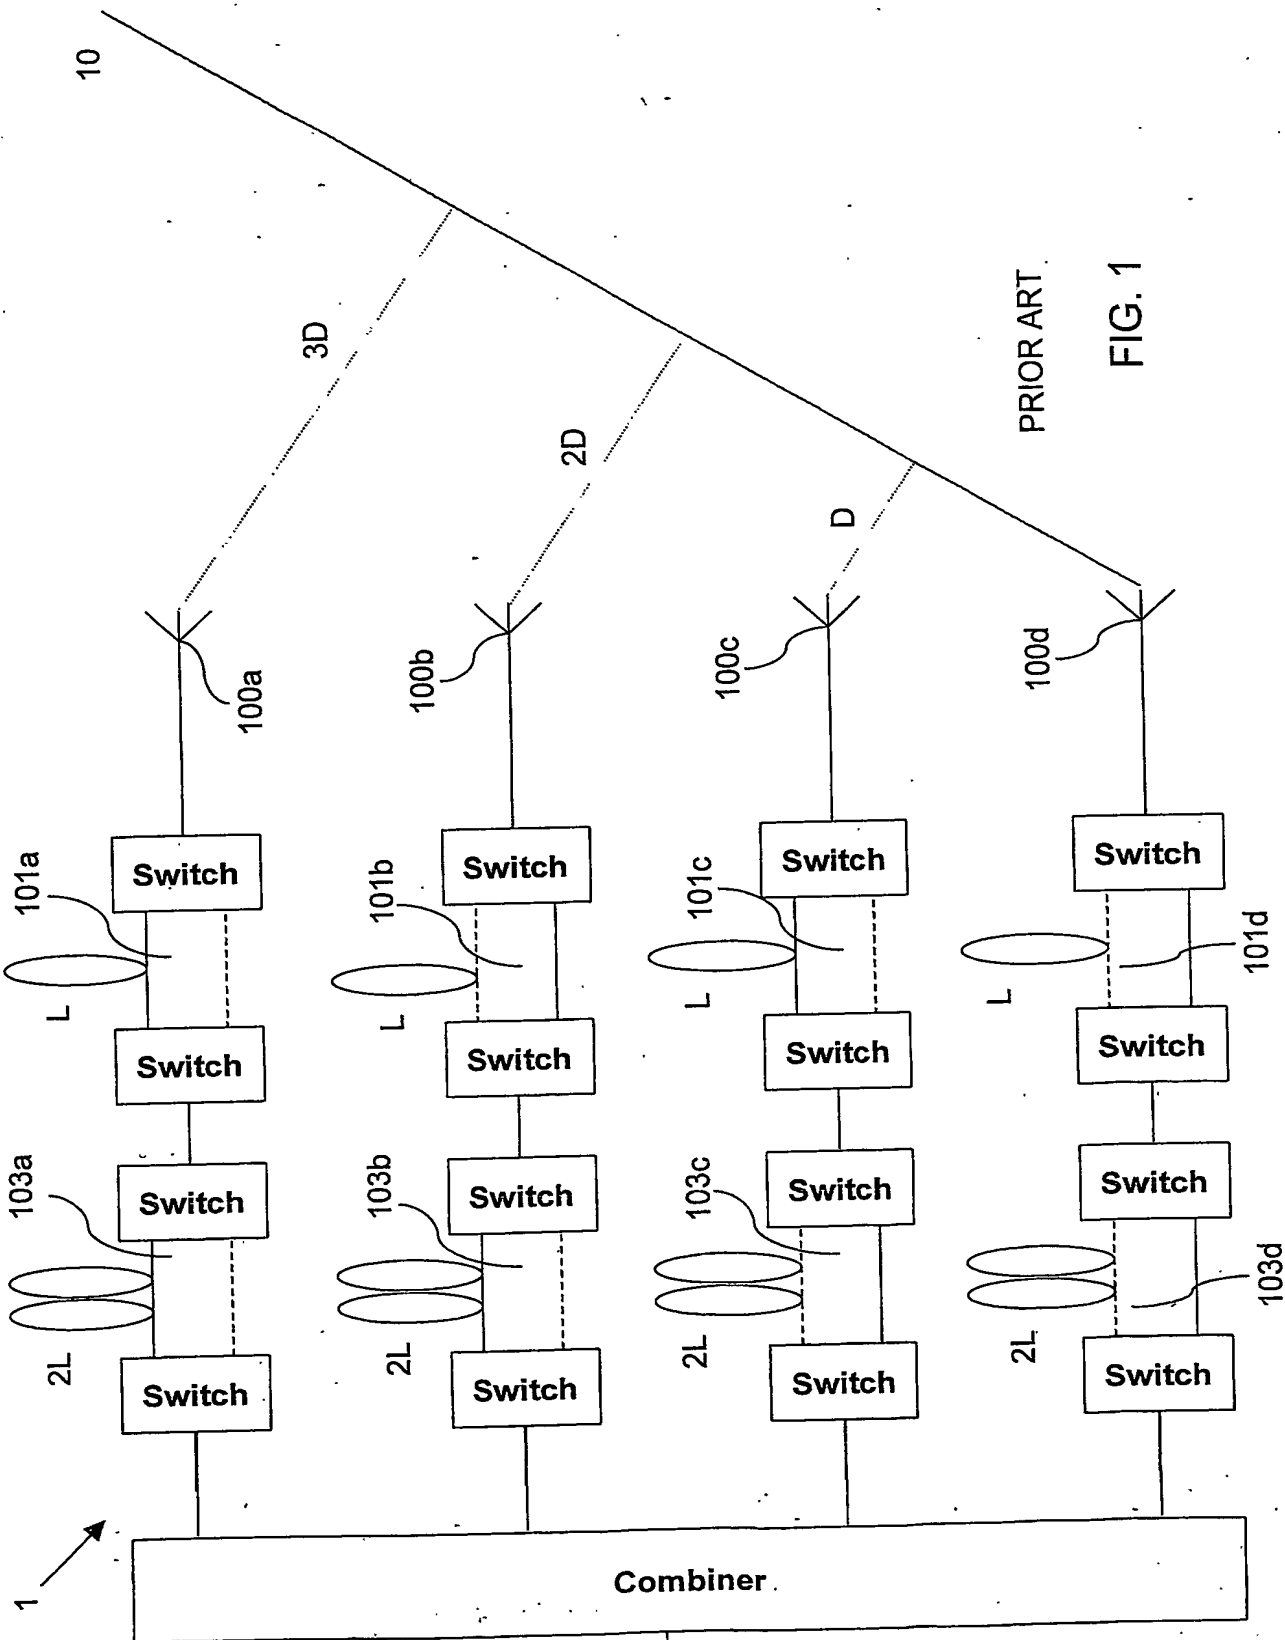

PRIOR ART

FIG. 1

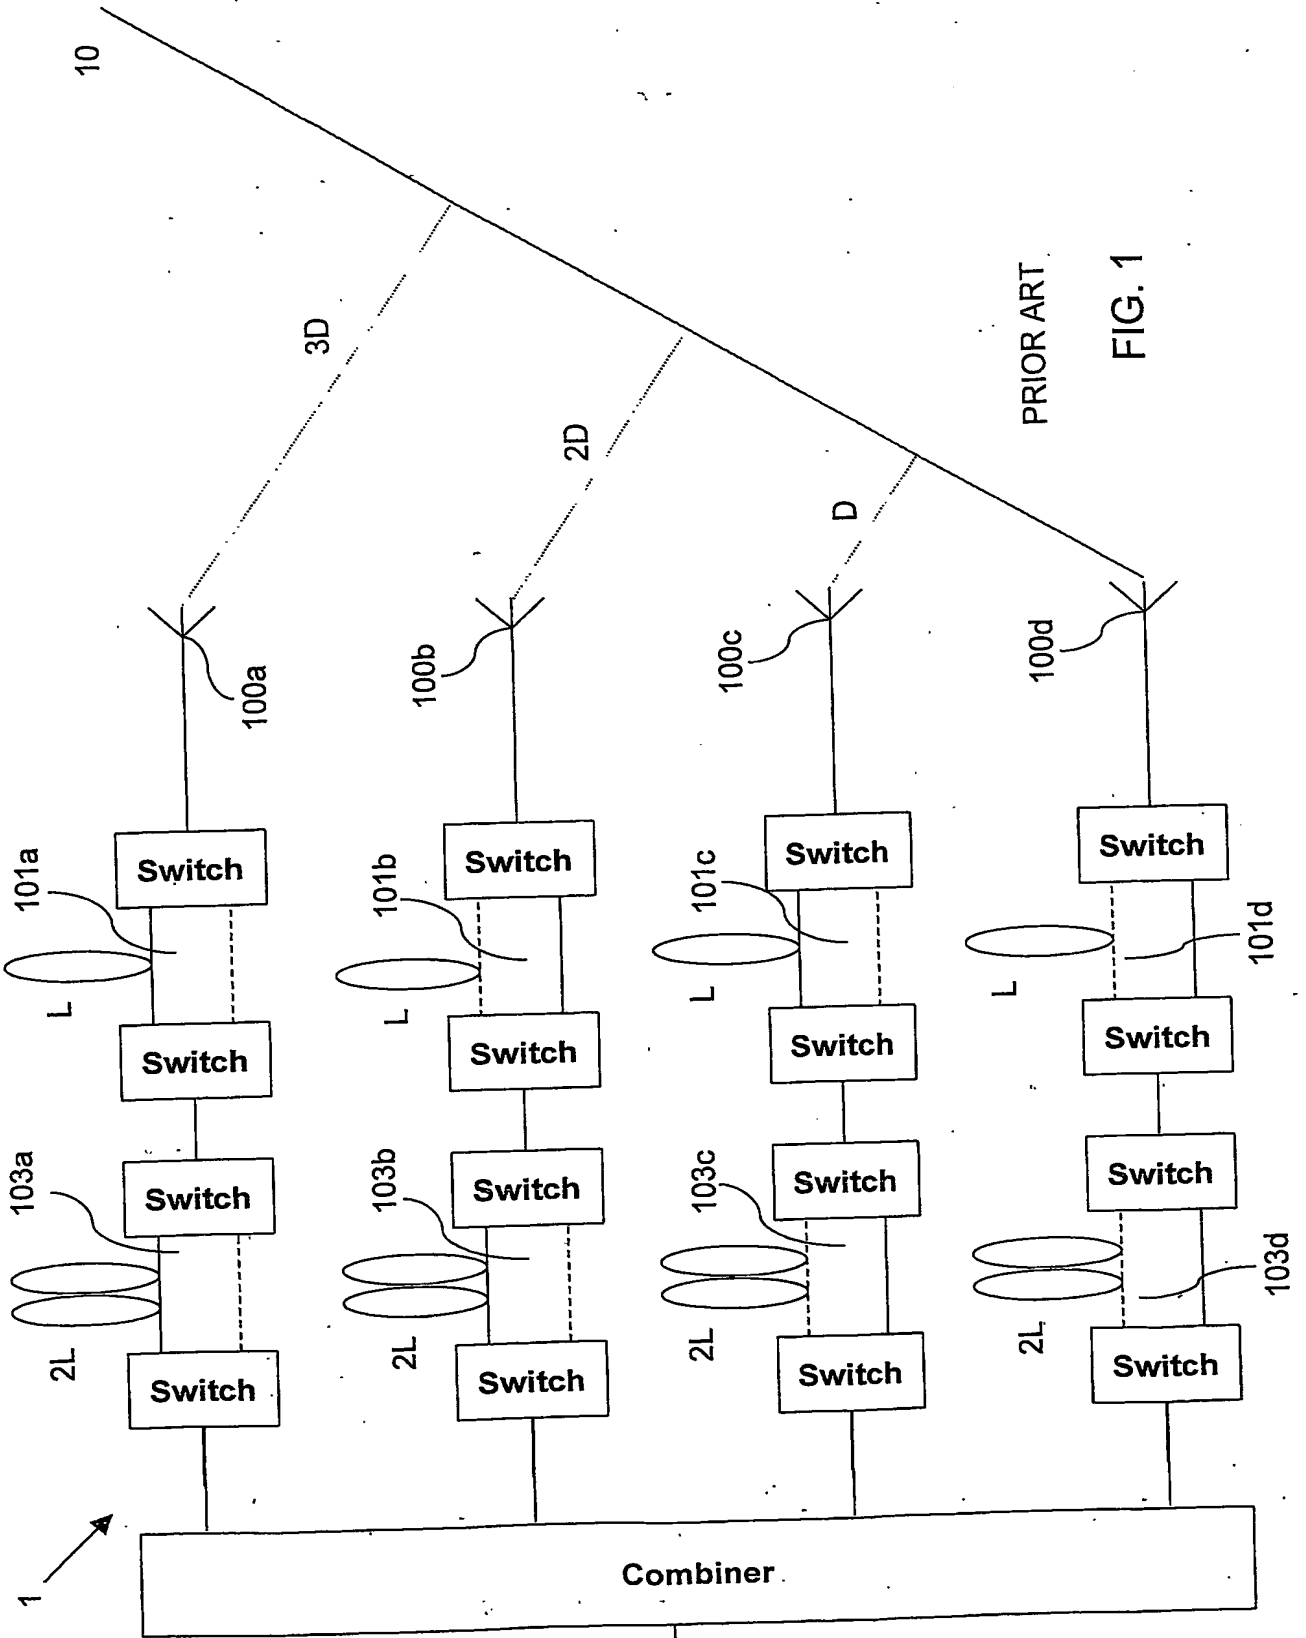

2

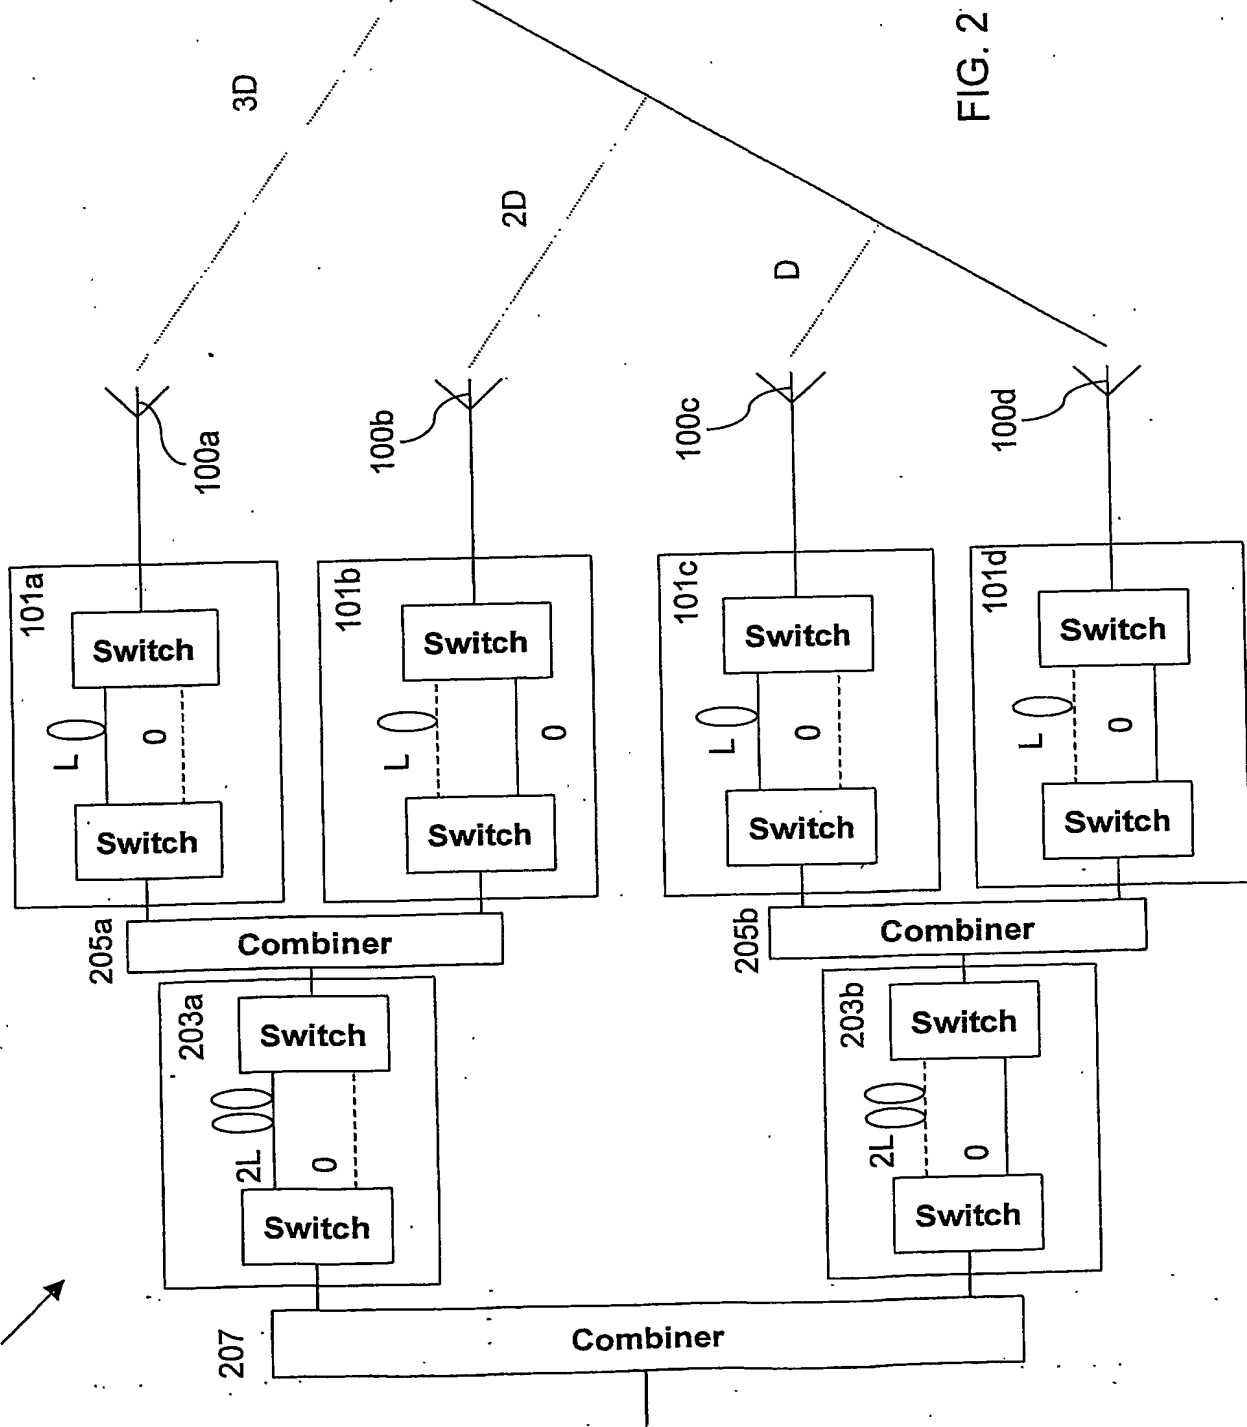


FIG. 2

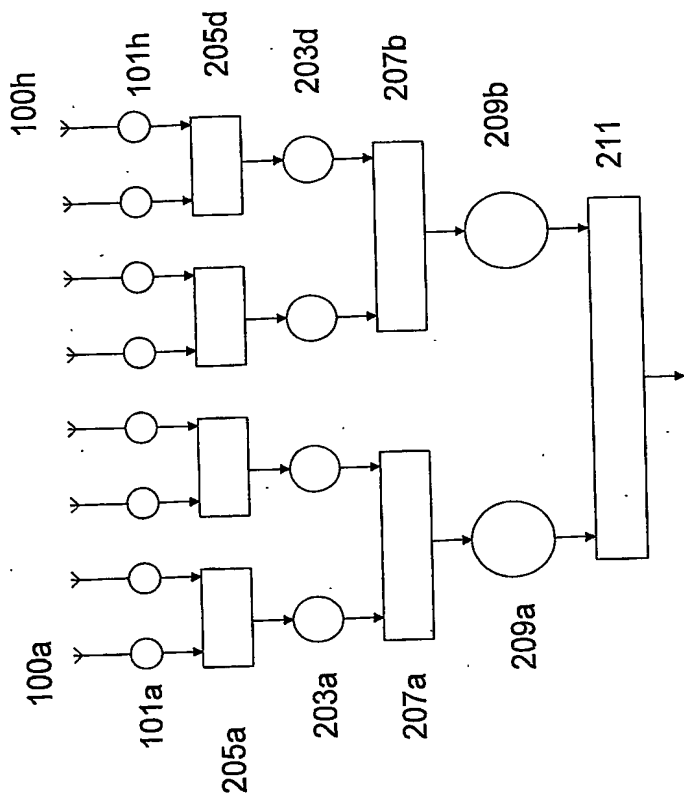


FIG. 3

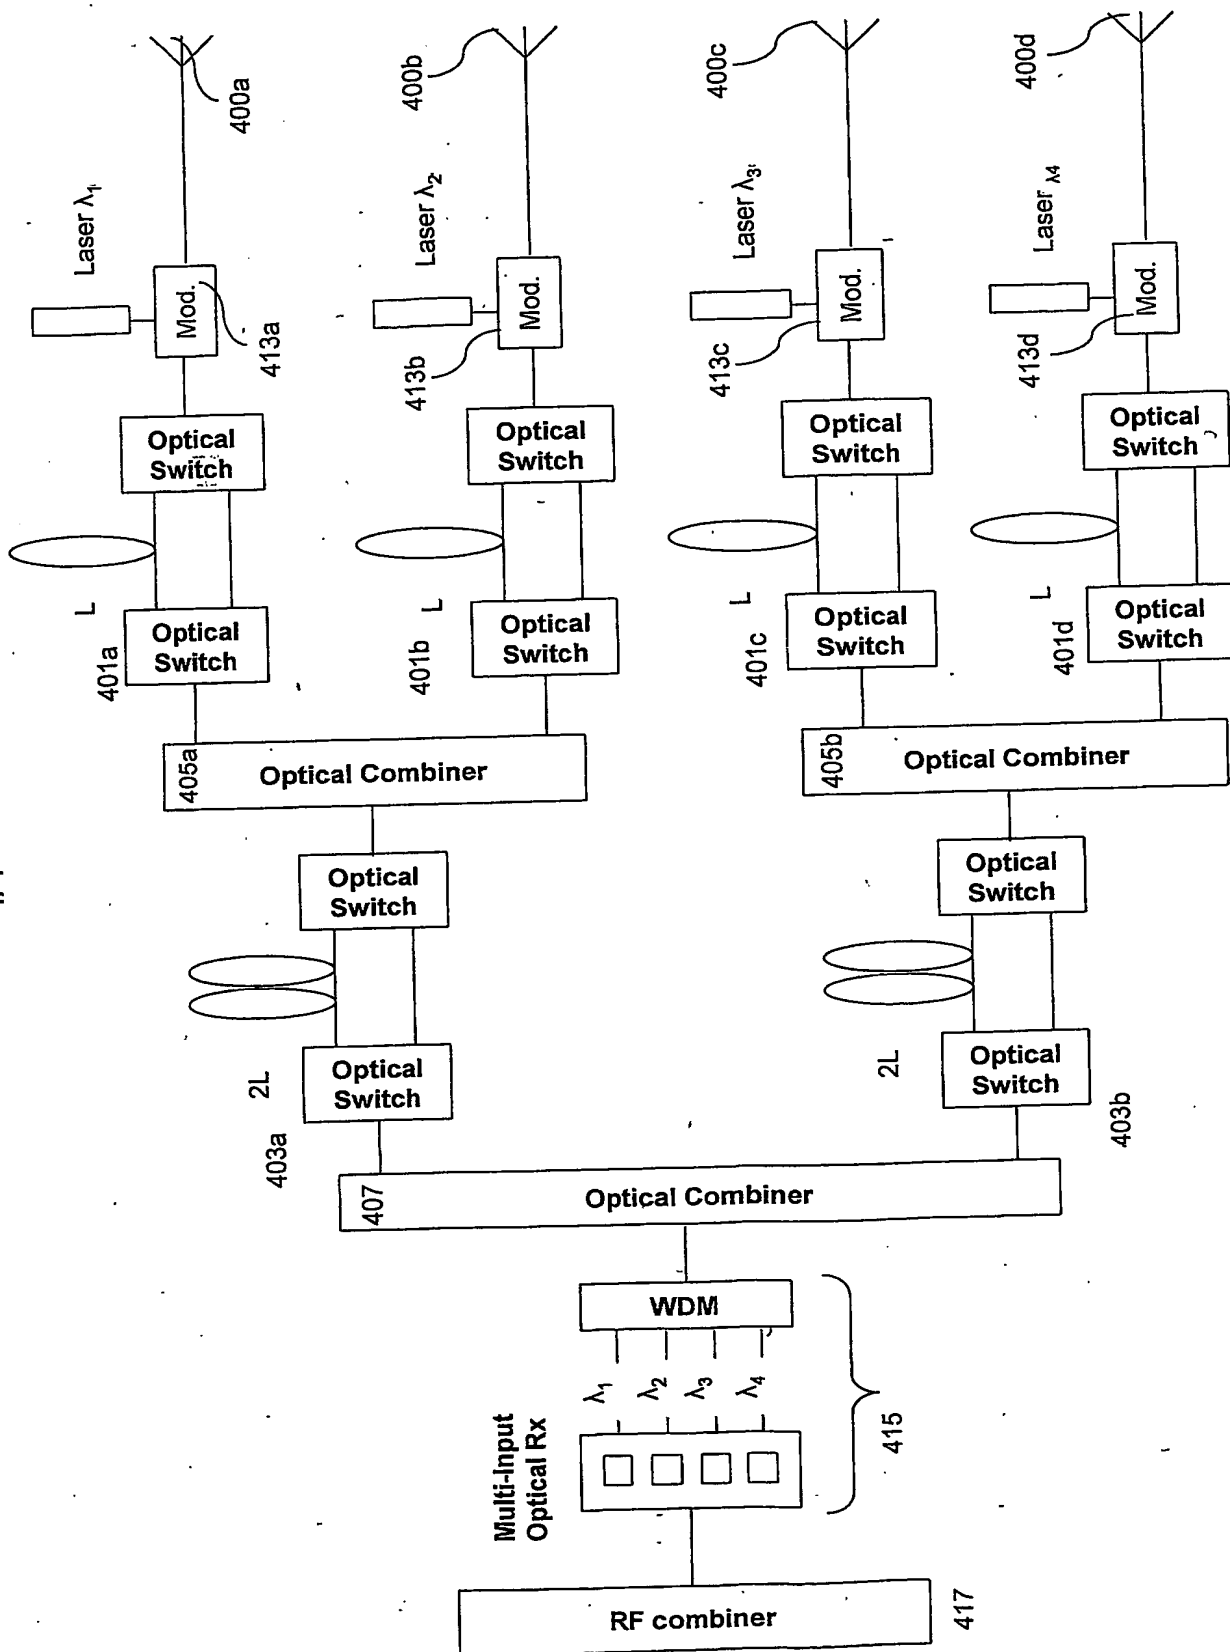


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.